

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)


PCT

(10) International Publication Number
WO 2004/015276 A1

- (51) International Patent Classification⁷: **F04D 29/46**, 29/44, 29/42, 29/52, 29/66, 29/54
- (21) International Application Number: **PCT/GB2002/003779**
- (22) International Filing Date: 13 August 2002 (13.08.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **HONEYWELL INTERNATIONAL, INC.** [US/US]; 101 Columbia Road AB-2B, P.O. Box 2245, Morristown, NJ 07962 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **CHEN, Hua** [GB/GB]; 14 Southcliffe, Great Hardwood, Lancashire BB6 7PP (GB).
- (74) Agent: **FREEMAN, Jacqueline, Carol**; W.P. Thompson & Co., 55 Drury Lane, London WC2B 5SQ (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMPRESSOR

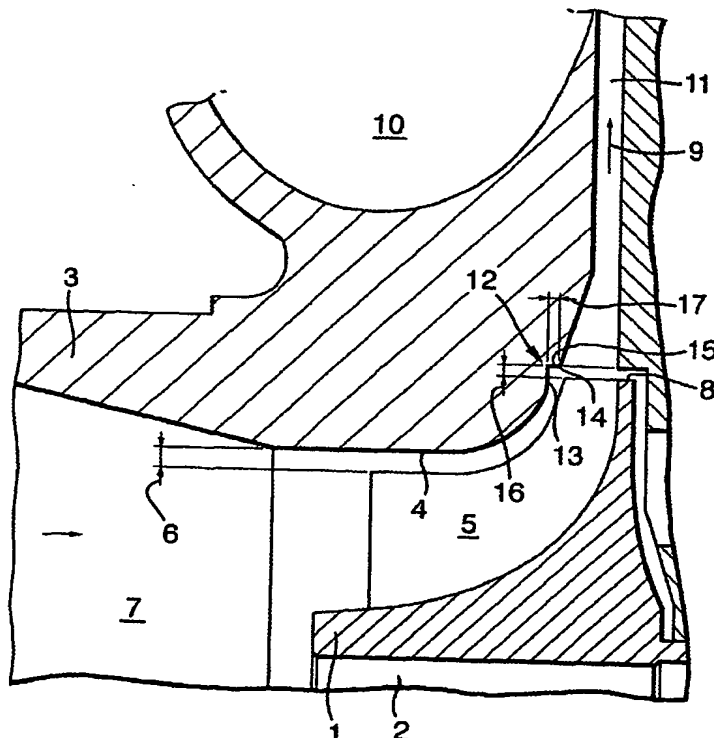

(57) Abstract: A compressor for a turbocharger comprising: a compressor wheel having compressor blades and being mounted for rotation on a shaft a shroud mounted adjacent the wheel and defining a gas flow path between the shroud and the blades from a compressor inlet to a diffuser outlet; wherein in cross-section the shroud has a surface in the flow path with a profile which includes a section with a smoothly curving surface with a smoothly curving surface and at least one relative discontinuity.



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

COMPRESSOR

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to compressors and has particular application in centrifugal compressors used in automotive turbochargers to improve fuel economy and reduce noxious emissions.

Description of the Related Art

An automotive turbocharger is described in the applicant's own prior publication WO02/44527. This comprises a turbine wheel, driven by exhaust gases from an internal combustion engine, turning a shaft on which is mounted a compressor wheel. The compressor wheel delivers compressed air to the engine, via a diffuser section, thus supplying air to the engine at a higher than normal rate to increase the engine efficiency and performance.

The component parts are mounted in a housing comprising a shroud around the compressor wheel. To maximise efficiency the shroud fits closely around the wheel and has a smooth profile following the shape of the wheel, from the air intake, over the wheel blades and past the wheel tip so that air flows smoothly into the diffuser part of the compressor.

A clearance must be provided between the shroud and the wheel to allow the wheel to spin freely. This clearance is kept to a minimum because it tends to allow a reverse flow of air from the diffuser back to the air inlet for the compressor wheel particularly when the compressor operates close to maximum. This is undesirable because it reduces the compressor efficiency, and increases compressor surge flow and noise.

The present invention has the advantage of reducing reverse flow, improving compressor efficiency and reducing noise.

According to the present invention there is provided a compressor comprising: a compressor wheel having compressor blades and being mounted for rotation on a shaft a shroud mounted adjacent the wheel and defining a gas flow path between the shroud and the blades from a compressor inlet to a diffuser outlet; wherein in cross-section the shroud has a surface in the flow path with a profile which includes a section with a smoothly curving surface and at least one relative discontinuity.

Such a compressor may be used in a turbocharger.

The discontinuity may comprise at least one relatively abrupt edge (compared to the gradient of the curving surface) or may comprise a step or cut-out or groove in the surface. For example a single planar surface may be cut into the curving surface either parallel to the axis of the shaft or perpendicular to it or at another angle. The curving section may be machined to join smoothly with the planar surface at each of its ends.

Alternatively a step may be machined out of the curving surface by cutting two planar surfaces, a first one parallel to the shaft axis and a second one perpendicular thereto, or at different angles.

Advantageously the discontinuity is formed by machining in the same operation which forms the rest of the compressor housing.

According to a preferred embodiment the discontinuity is located at a predetermined radius from the shaft which radius is larger than the radius of the wheel.

According to a particularly preferred embodiment the radial distance between the discontinuity and the wheel tip is of the same approximate order as the radial clearance between the wheel and the housing at the wheel leading edge.

According to a second embodiment of the invention a second discontinuity is provided in the region of the leading edge of the wheel. The second discontinuity may take any of the forms described for the first discontinuity, ie be a step, cut-out or groove in the smoothly curving surface of the shroud.

Preferably the second discontinuity lies just upstream of the leading edge of the wheel blades, advantageously spaced therefrom by a distance of the same order as the axial clearance of the wheel tip from the compressor housing.

The radial extent of the second discontinuity may preferably be of the same order as the radial clearance between the wheel inducer tip, or leading edge tip, and the housing. The sizes and shapes of the two discontinuities may be made closely similar or identical.

A compressor according to the present invention can be assembled in the traditional way and thus no additional assembly costs are incurred.

A compressor according to the invention is found to add a greater resistance to, thus reducing the strength of, the reverse flow, and to be more efficient.

For a better understanding of the present invention, and to show how the same may be carried into effect, reference will now be made to the accompanying drawings, in which:

Figure 1 is a cross sectional view of part of a compressor illustrating the shape of a compressor shroud according to one embodiment of the present invention;

Figure 2 is a close up cross sectional sketch of part of the compressor shroud of figure 1 with some features exaggerated in dimension to more clearly illustrate the invention.

Figure 3 is a close up cross-sectional view of part of the compressor shroud according to a second embodiment of the present invention again with some features

exaggerated in dimension.

Figures 4a to 4h illustrate various possible shapes in cross-section for part of the shroud of any of the above figures.

In figure 1 a compressor wheel comprises a hub 1, tapering to a tip 8, at the trailing edge, and attached to blades of which the radial extent is indicated at 5. The wheel is mounted for rotation on a shaft 2 within a compressor housing 3. The wall of the housing 3 forms a shroud 4 spaced from the blades 5 of the wheel by a clearance distance 6.

An air inlet 7 allows entry of air to the wheel which compresses it and the compressed air exits the wheel along diffuser passageway 11 past the tip 8 of the wheel in the direction of arrow 9 to a volute diffuser 10 from where it is subsequently supplied to an engine (not shown).

The wall of the housing 3 which forms the shroud 4 is traditionally a smoothly curved surface as it passes the wheel. However in this invention the shroud 4 has a discontinuity, ie is stepped. Thus, as can be seen more clearly in figure 2, a small cut-out 12 is moulded, cast, or machined in the wall in the region of the wheel tip 8. The cut-out 12 has at least one relatively sharp corner 13 and in this embodiment has a second sharp corner 14 and a straight portion 15 extending generally parallel to the shaft 2.

Between the cut-out 12 and the wheel tip 8 is a radial clearance distance 16 which is of the same order as the radial distance 6 between the wheel and the housing 3 at the wheel leading edge.

The cut-out 12 has an axial length 17 which is of the same order as the axial clearance 6 between the wheel and the housing 3 at the wheel trailing edge.

The dimensions of the cut-out 12 are exaggerated in figures 2 and 3 to more clearly illustrate the invention. The true intended proportions are more accurately illustrated in figure 1. For example, a compressor having an air inlet 7 of

approximately 38 mm with a wheel exducer tip 8 of approximately 52mm, might typically have a wheel tip to housing clearance 20 of 0.50mm and radial clearance 6 of 0.3mm and a cut-out 12 with radial clearance distance 16 of also about 0.30 to 0.50mm. The axial overlap of the cut-out 12 with the blades 5 might typically be as small as 0.16mm.

This cut-out 12 can relatively easily be machined with the rest of the housing contour, for example by NC (Numerical Controlled) machining. There would be very minimal additional cost involved if any.

In figure 3 a preferred embodiment of the invention is shown in which a second step 22 is provided in the region of the leading edge of the wheel and blades 5, preferably just upstream of the blade edge and spaced therefrom by a distance 18 which is approximately the same as the wheel-housing axial clearance 23 at the impeller trailing edge, ie the wheel tip 8 (this is the distance between the housing shroud and the wheel shroud which allows some slight axial movement of the wheel as it spins. The second step 22 has a radial height 19 which is of the same order or approximately equal to the wheel-housing radial clearance 6 at the impeller leading edge 8. Thus the radial heights 16, 19 of each step 12, 22 are approximately the same and are equal to the wheel housing radial clearance 6.

The step or steps in the shroud contour present relatively sharp edges to any reverse flow of air from the diffuser 10 to the air entrance 7. This provides a resistance or blockage to reverse flow, forcing it to go through the impeller blade channel. The reverse flow is thus weakened and its effects reduced. Use of the present invention can reduce noise levels in a turbocharger and increase efficiency.

Figures 4a to 4h illustrate eight possible shapes for the cross-sectional contour of the shroud 4 of the housing 3, in the region of the discontinuity or step 12. Many other possibilities will be evident to a person skilled in the art.

In figures 4a and 4e the discontinuity 12 is formed at the single point junction of two curving sections 25, 26. In figure 4a the two curving sections 25, 26 join at an obtuse angle and in figure 4e they join at an acute angle.

In figure 4b two planar surfaces are cut into the curved shroud surface 4, a first planar surface 27 parallel to the shaft axis, and a second planar surface 28 perpendicular to the shaft axis, so that they meet at right angles. The orientations of the planar surfaces may be different so that they meet at either obtuse or acute angles, as for example in figure 4f where the planar surfaces 27 and 28 meet at an acute angle.

In figure 4c a single planar surface 27 parallel to the shaft axis is cut and on one side the curved surface 4 is machined to curve at a steeper angle to meet the planar surface 27.

Likewise in figure 4d where the single planar surface 28 is machined parallel to the wheel radius.

In figures 4g and 4h the discontinuity 12 is in the form of a groove. In figure 4g this is a groove with curved sides, essentially a semicircular cross-section. In figure 4h the groove has straight sides, ie a rectangular cross-section.

Any of these shapes, as illustrated in figures 4a to 4h may be used for either or both of the discontinuities discussed.

The shape and size of the or each discontinuity or step 12 will be determined by the operating parameters and mechanical structure of the compressor. For example if the compressor is intended to operate close to its surge line, then the or each step may be made deeper and/or the angle of the discontinuity made larger.

More than one step in each or either of the leading and trailing edges may also be advantageous.

CLAIMS

1. A compressor comprising:
a compressor wheel having compressor blades and being mounted for rotation on a shaft;
a shroud mounted adjacent the wheel and defining a gas flow path between the shroud and the blades from a compressor inlet to a diffuser outlet;
wherein in cross-section the shroud has a surface in the flow path with a profile which includes a section with a smoothly curving surface and at least one relative discontinuity.
2. A compressor according to claim 1 wherein the discontinuity is located at a predetermined radius from the shaft which radius is larger than the radius of the wheel.
3. A compressor according to any one of the preceding claims wherein the radial distance between the discontinuity and the tip of the leading edge of the wheel is of the same approximate order as the radial clearance between the wheel and the housing at the wheel leading edge.
4. A compressor according to any one of the preceding claims comprising a second discontinuity provided in the curving surface in the region of the leading edge of the wheel.
5. A compressor according to claim 4 wherein the second discontinuity is located upstream of the leading edge of the wheel blades.
6. A compressor according to claim 5 wherein the second discontinuity is spaced from the leading edge of the wheel blades by a distance of the same order as the axial clearance of the wheel tip from the compressor housing.
7. A compressor according to any one of the preceding claims wherein the or each discontinuity comprises an abrupt edge relative to the gradient of the curving surface.

8. A compressor according to claim 7 wherein the abrupt edge comprises a step in the curving surface.
9. A compressor according to any one of the preceding claims wherein the or each discontinuity comprises a planar surface cut into the curving surface.
10. A compressor according to claim 9 wherein the planar surface is parallel to the axis of the shaft.
11. A compressor according to claim 9 wherein the planar surface is perpendicular to the axis of the shaft.
12. A compressor according to any one of claims 4 to 11 wherein the radial extent of the second discontinuity is of the same order as the radial clearance between the wheel tip and the housing.
13. A compressor according to any one of claims 4 to 12 wherein the sizes of the first and second discontinuities are closely similar.
14. A compressor according to any one of claims 4 to 13 wherein the shapes of the first and second discontinuities are closely similar.
15. A turbocharger comprising a compressor according to any one of the preceding claims.

Fig.1.

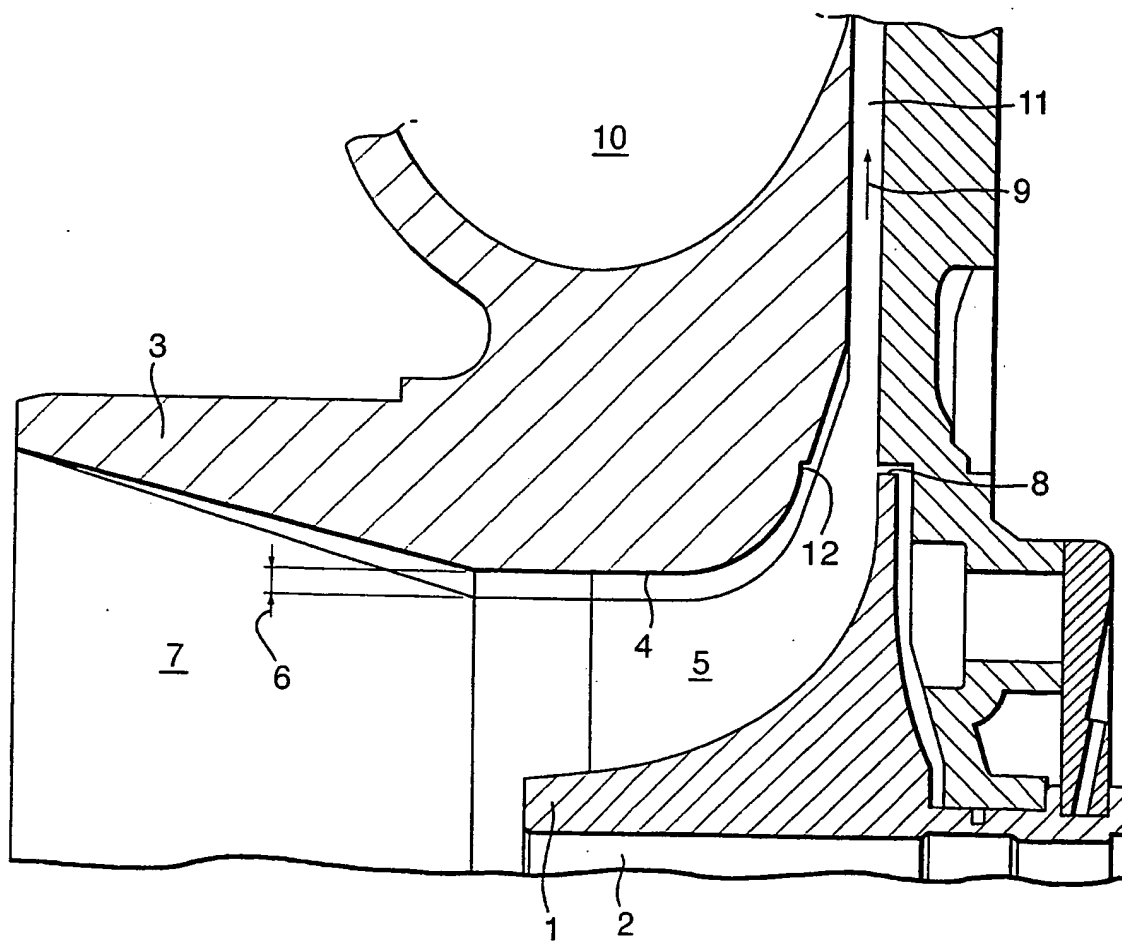


Fig.2.

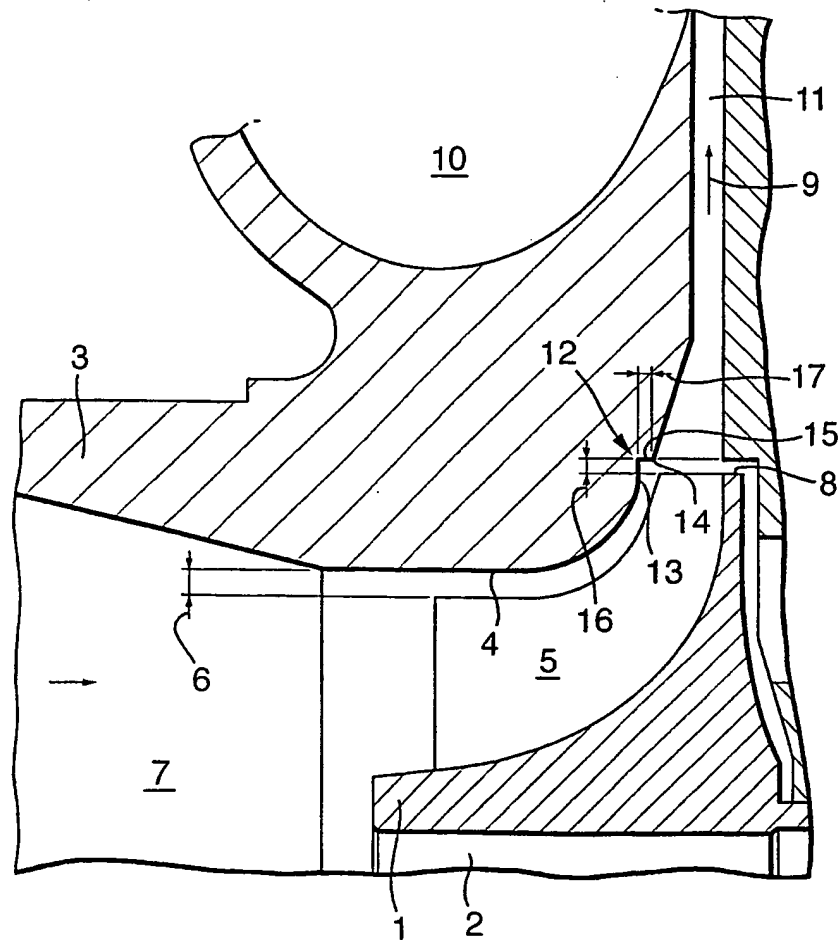


Fig.3.

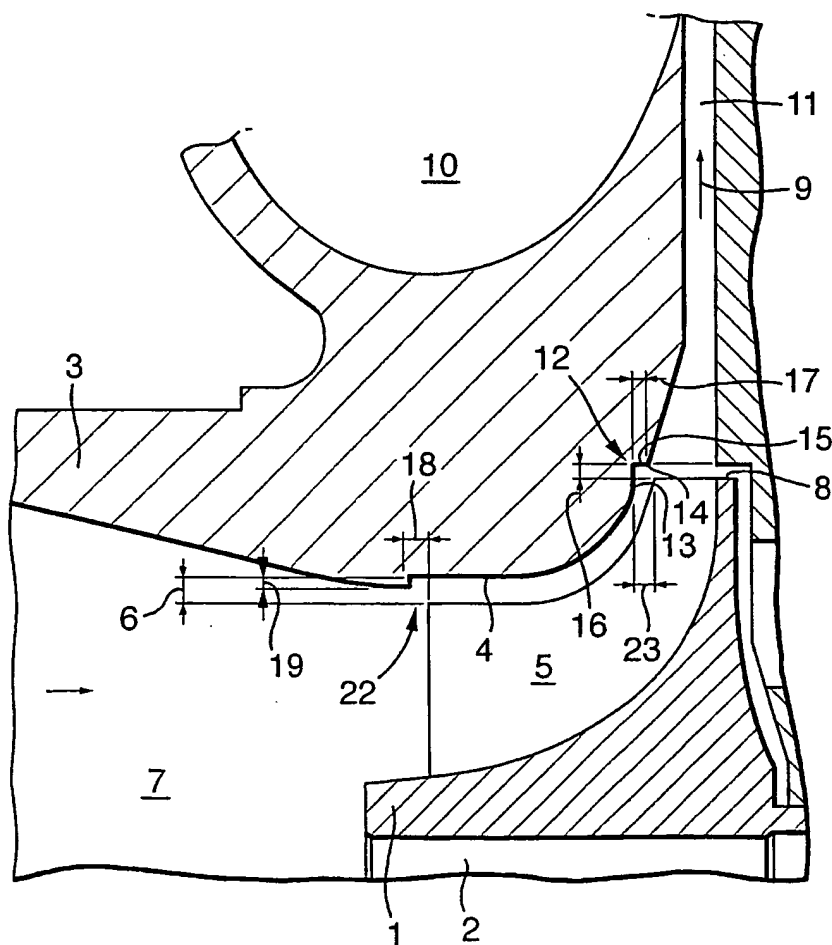


Fig.4a.

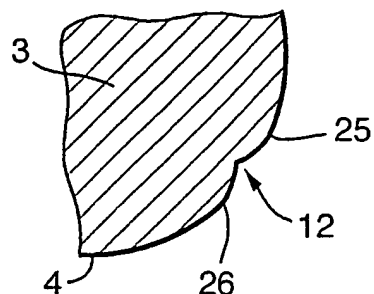


Fig.4b.




Fig.4c.




Fig.4d.




Fig.4e.




Fig.4f.




Fig.4g.





Fig.4h.



INTERNATIONAL SEARCH REPORT

PCT/GB 02/03779

A. CLASSIFICATION OF SUBJECT MATTER IPC 7 F04D29/46 F04D29/44 F04D29/42 F04D29/52 F04D29/66 F04D29/54		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 7 F04D		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 034 435 A (GERRY U) 4 June 1980 (1980-06-04) the whole document	1-15
X	EP 1 126 133 A (GEN ELECTRIC) 22 August 2001 (2001-08-22) column 8, line 21 - line 34	1
X	US 4 930 979 A (FISHER FRANK B ET AL) 5 June 1990 (1990-06-05) column 1, line 52 -column 4, line 9	1
X	US 4 315 714 A (EXLEY JOHN T ET AL) 16 February 1982 (1982-02-16) column 2, line 23 -column 3, line 60	1
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "G" document member of the same patent family		
Date of the actual completion of the international search 4 October 2002		Date of mailing of the international search report 15/10/2002
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016		Authorized officer Fistas, N

INTERNATIONAL SEARCH REPORT

PCT/GB 02/03779

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 460 309 A (WALSH THOMAS C) 17 July 1984 (1984-07-17) column 2, line 12 - line 51 -----	1
A	WO 02 44527 A (ESPASA OLIVIER ; HONEYWELL GARRETT SA (FR); LOMBARD ALAIN RENE (FR)) 6 June 2002 (2002-06-06) cited in the application abstract -----	1

INTERNATIONAL SEARCH REPORT

PCT/GB 02/03779

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2034435	A	04-06-1980	DE 2942703 A1	08-05-1980
			FR 2439869 A1	23-05-1980
			IT 1125995 B	14-05-1986
			JP 55060699 A	07-05-1980
EP 1126133	A	22-08-2001	US 6338609 B1	15-01-2002
			BR 0100566 A	09-10-2001
			EP 1126133 A2	22-08-2001
			JP 2001280295 A	10-10-2001
			PL 345840 A1	27-08-2001
US 4930979	A	05-06-1990	BR 8606418 A	13-10-1987
			DE 3670347 D1	17-05-1990
			EP 0229519 A1	22-07-1987
			JP 2569029 B2	08-01-1997
			JP 62178799 A	05-08-1987
			US 4743161 A	10-05-1988
US 4315714	A	16-02-1982	US 4164845 A	21-08-1979
			US 4368005 A	11-01-1983
US 4460309	A	17-07-1984	US 4371311 A	01-02-1983
			CA 1157779 A1	29-11-1983
			DE 3112008 A1	14-01-1982
			FR 2481379 A1	30-10-1981
			GB 2075130 A ,B	11-11-1981
			IL 62345 A	31-05-1985
			JP 1600031 C	31-01-1991
			JP 2022239 B	17-05-1990
			JP 56167899 A	23-12-1981
			SE 452181 B	16-11-1987
			SE 8101917 A	29-10-1981
WO 0244527	A	06-06-2002	WO 0244527 A1	06-06-2002
			AU 2181201 A	11-06-2002